



Oljeutskillere og sandfang

OLJEUTSKILLERE med Koalescensfilter

Testet etter NS-EN 858-1 (CEN)




OBK 7-10

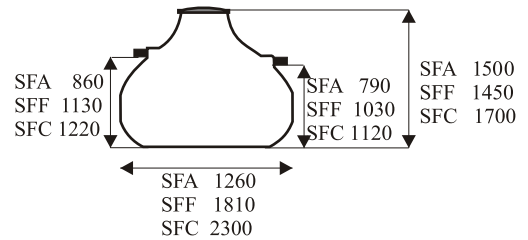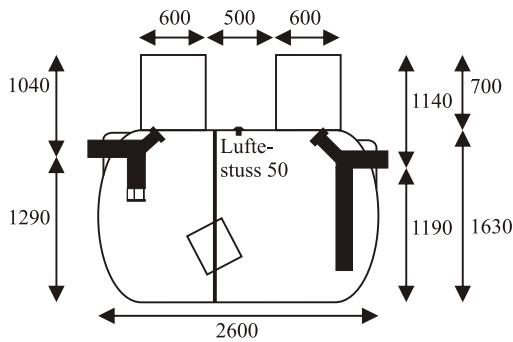


Sandfang type SFA, SFF og SFC
1 m³, 2 m³ og 4 m³

OBK 20, OBK 40, OBK 60, OBK 90

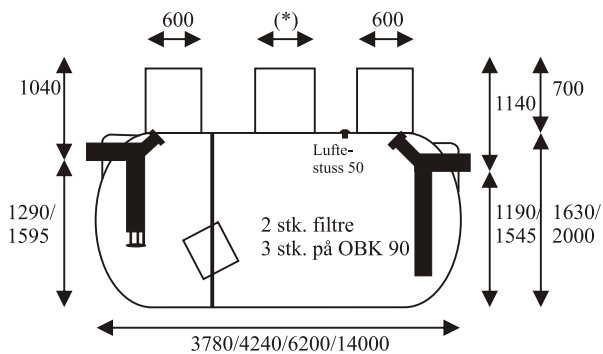

(*) OBK 20 = 600 Øvrige = 800

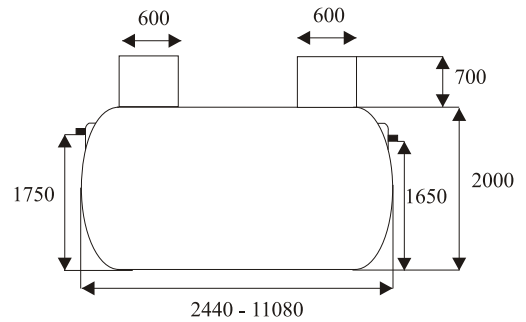

Sandfang type SFL 6 til SFL 30



NRF	Type	Kap. NS*.	Lengde	Bredde	Høyder:			Pris	Strekkode
					Inn	Ut	Total		
3240551	OBK 7-10*	7/10	2600	1600	1290	1190	2330		
3240553	OBK 20	20	3780	1600	1290	1190	2330		
3240555	OBK 40	40	4240	2000	1595	1545	2700		
3240557	OBK 60	60	6200	2000	1595	1545	2700		
3240561	SFA	$\frac{Vol. m^3}{1}$	1260	1260	870	800	1500		
3240562	SFF	2	1810	1810	1100	1000	1430		
3240563	SFC	4	2300	2300	1170	1070	1700		
3240564	SFL 6	6	2440	2000	1750	1650	2700		
3240565	SFL 8	8	3160	2000	1750	1650	2700		
3240566	SFL10	10	3880	2000	1750	1650	2700		
3240411	I-15-160	$\frac{Diam.}{600}$	600	600	300	100	1430		
3240413	I-15-200	600	600	600	300	100	1430		
3240417	IP-15-315	900	900	900	300	100	1430		
3240541	Alarm								

*OBK dimensjoneres i liter/sekund etter NS-EN 858 del 2.